

# CSP in Python

# Overview

- **Python-constraint** is a good package for solving CSP problems in Python
- Installing it
- Using it
- Examples in
  - Magic Squares
  - Map coloring
  - Sudoku puzzles
  - HW?: Battleships

# Installation

- On your own computer
  - pip install python-constraint
  - sudo pip install python-constraint
- Install locally on gl
  - pip3 install –user python-constraints
- Install locally on UMBC Jupyter hub server by executing this once in a notebook
  - !pip install –user python-constraints
- Clone source from github
  - <https://github.com/python-constraint>

# Simple Example

```
>>> from constraint import *
>>> p = Problem()
>>> p.addVariable("a", [1,2,3])
>>> p.addVariable("b", [4,5,6])
>>> p.getSolutions()
[{'a': 3, 'b': 6}, {'a': 3, 'b': 5}, {'a': 3, 'b': 4},
 {'a': 2, 'b': 6}, {'a': 2, 'b': 5}, {'a': 2, 'b': 4},
 {'a': 1, 'b': 6}, {'a': 1, 'b': 5}, {'a': 1, 'b': 4}]

>>> p.addConstraint(lambda x,y: 2*x == y, ('a', 'b'))
>>> p.getSolutions()
[{'a': 3, 'b': 6}, {'a': 2, 'b': 4}]
```

# Simple Example

```
>>> from constraint import *
>>> p = Problem()
>>> p.addVariable("a", [1,2,3])
>>> p.addVariable("b", [4,5,6])
>>> p.getSolutions()
[{'a': 3, 'b': 6}, {'a': 3, 'b': 5}, {'a': 3, 'b': 4},
 {'a': 2, 'b': 6}, {'a': 2, 'b': 5}, {'a': 2, 'b': 4},
 {'a': 1, 'b': 6}, {'a': 1, 'b': 5}, {'a': 1, 'b': 4}]
>>> p.addConstraint(lambda x,y: 2*x==y, ('a','b'))
>>> p.getSolutions()
[{'a': 3, 'b': 6}, {'a': 2, 'b': 4}]
```

variable name

domain


9 solutions  
(instantiations)

two variables

constraint function


# Magic Square

- An  $N \times N$  array of integers where all rows, columns and diagonals sum to the same number
- Given  $N$  (e.g., 3) and magic sum (e.g., 15), find cell values
- What are the
  - Variables & their domains
  - Constraints

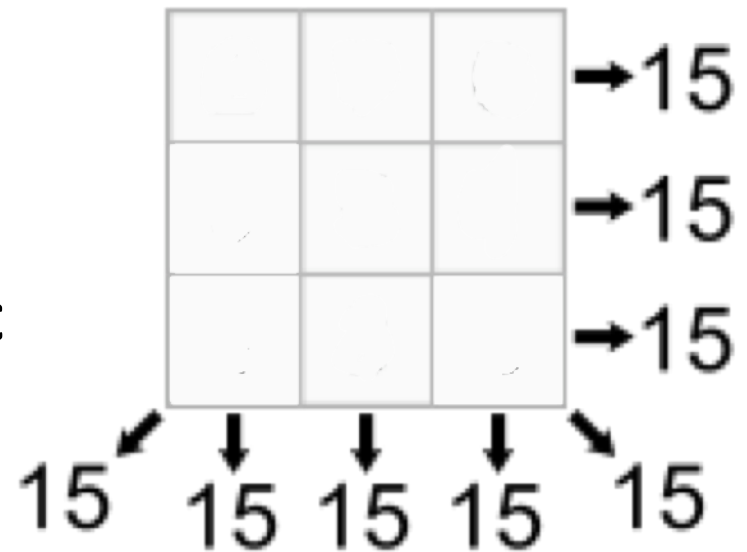

# Magic Square

- An  $N \times N$  array of integers where all rows, columns and diagonals sum to the same number
- Given  $N$  (e.g., 3) & magic sum (e.g., 15), find cell values
- What are the

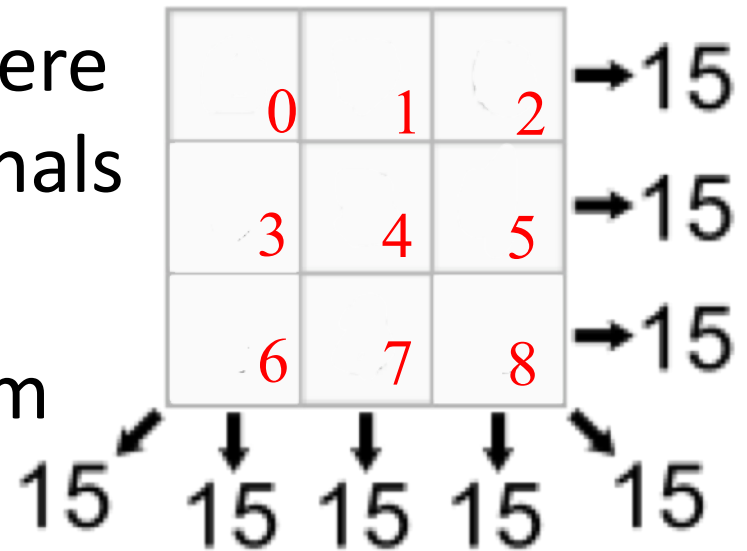


– **Variables** & their **domains** [1,2,...9]

– **Constraints**

**All variables have different values**  
 $v_0 + v_1 + v_2 == 15$ ,  $v_0 + v_3 + v_6 == 15$ , ...

# Magic Square

- An  $N \times N$  array of integers where all rows, columns and diagonals sum to the same number
- Given  $N$  (e.g., 3) and the magic sum (e.g., 15) find the cell values
- What are the
  - Variables & their domains
  - Constraints

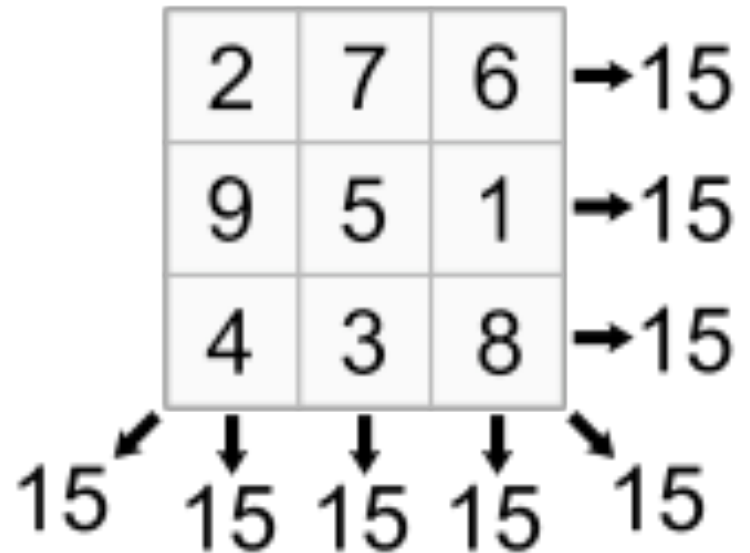



# 3x3 Magic Square

numbers as variables: 0..8

domain of each is 1..10

built-in constraint functions

variables involved with constraint

```
from constraint import *
```

```
p = Problem()
```

```
p.addVariables(range(9), range(1, 10))
```

```
p.addConstraint(AllDifferentConstraint(), range(9))
```

```
p.addConstraint(ExactSumConstraint(15), [0, 4, 8])
```

```
p.addConstraint(ExactSumConstraint(15), [2, 4, 6])
```

```
for row in range(3):
```

```
    p.addConstraint(ExactSumConstraint(15),  
                    [row*3+i for i in range(3)])
```

```
for col in range(3):
```

```
    p.addConstraint(ExactSumConstraint(15),  
                    [col+3*i for i in range(3)])
```

# 3x3 Magic Square

```
sols = p.getSolutions()  
print sols
```

```
for s in sols:  
    print  
    for row in range(3):  
        for col in range(3):  
            print s[row*3+col],  
        print
```

# 3x3 Magic Square

```
> python ms3.py
```

```
[{0:6,1:7,2:2,...8:4}, {0:6,1:...}, ...]
```

```
6 7 2
```

```
1 5 9
```


```
8 3 4
```

```
6 1 8
```

```
7 5 3
```

```
2 9 4
```

```
... six more solutions ...
```

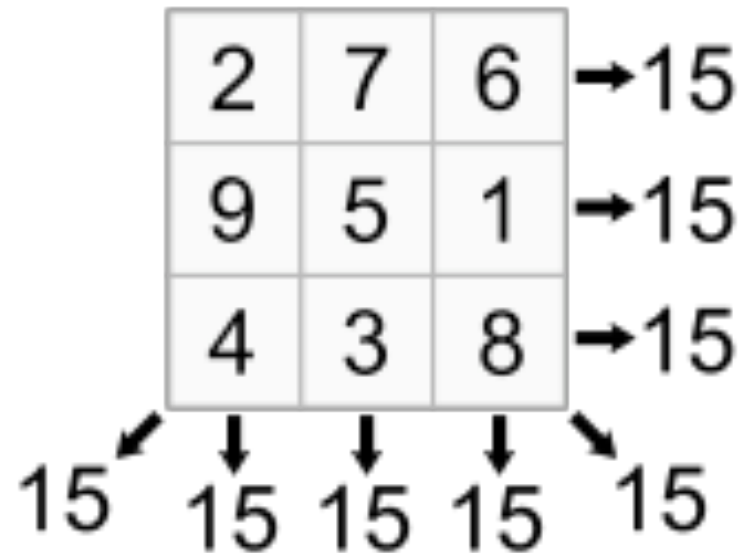

# Predefined Constraints

- Constraints on a set of variables:

- AllDifferentConstraint()

- AllEqualConstraint()

- MaxSumConstraint()

- ExactSumConstraint()

- MinSumConstraint()

- Examples:


```
p.addConstraint(ExactSumConstraint(100), [11,...19])
```

```
p.addConstraint(AllDifferentConstraint(), [11,...19])
```

# New Constraint Functions

- Define new constraint functions that take:
  - F: a function of N ( $N > 0$ ) arguments
  - V: a list of N variables
- Can be defined & referenced by name or defined locally via lambda expressions
  - `p.addConstraint(lambda x,y:x==2*y, [11,22])`
  - `def dblfn(x,y): return x == 2*y`  
`P.addConstraint(dblfn, [11,22])`


# Map Coloring



```
def color(map, colors=['red', 'green', 'blue']):
    (vars, adjoins) = parse_map(map)
    p = Problem()
    p.addVariables(vars, colors)
    for (v1, v2) in adjoins:
        p.addConstraint(lambda x,y: x!=y, [v1, v2])
    solution = p.getSolution()
    if solution:
        for v in vars:
            print "%s:%s " % (v, solution[v]),
        print
    else:
        print 'No solution found :-('

australia = "SA:WA NT Q NSW V; NT:WA Q; NSW: Q V; T:"
```

# Map Coloring



```
australia = 'SA:WA NT Q NSW V; NT:WA Q; NSW: Q V; T:'
```

```
def parse_map(neighbors):
    adjoins = []
    regions = set()
    specs = [spec.split(':') for spec in neighbors.split(';')]
    for (A, Aneighbors) in specs:
        A = A.strip();
        regions.add(A)
        for B in Aneighbors.split():
            regions.add(B)
            adjoins.append([A,B])
    return (list(regions), adjoins)
```

# Sudoku

```
def sudoku(initValue):
    p = Problem()
    # Define a variable for each cell: 11,12,13...21,22,23...98,99
    for i in range(1, 10) :
        p.addVariables(range(i*10+1, i*10+10), range(1, 10))
    # Each row has different values
    for i in range(1, 10) :
        p.addConstraint(AllDifferentConstraint(), range(i*10+1, i*10+10))
    # Each column has different values
    for i in range(1, 10) :
        p.addConstraint(AllDifferentConstraint(), range(10+i, 100+i, 10))
    # Each 3x3 box has different values
    p.addConstraint(AllDifferentConstraint(), [11,12,13,21,22,23,31,32,33])
    p.addConstraint(AllDifferentConstraint(), [41,42,43,51,52,53,61,62,63])
    p.addConstraint(AllDifferentConstraint(), [71,72,73,81,82,83,91,92,93])
    p.addConstraint(AllDifferentConstraint(), [14,15,16,24,25,26,34,35,36])
    p.addConstraint(AllDifferentConstraint(), [44,45,46,54,55,56,64,65,66])
    p.addConstraint(AllDifferentConstraint(), [74,75,76,84,85,86,94,95,96])
    p.addConstraint(AllDifferentConstraint(), [17,18,19,27,28,29,37,38,39])
    p.addConstraint(AllDifferentConstraint(), [47,48,49,57,58,59,67,68,69])
    p.addConstraint(AllDifferentConstraint(), [77,78,79,87,88,89,97,98,99])
    # add unary constraints for cells with initial non-zero values
    for i in range(1, 10) :
        for j in range(1, 10):
            value = initValue[i-1][j-1]
            if value: p.addConstraint(lambda var, val=value: var == val, (i*10+j,))
    return p.getSolution()
```



# Sudoku Input

```
easy = [[0,9,0,7,0,0,8,6,0],  
        [0,3,1,0,0,5,0,2,0],  
        [8,0,6,0,0,0,0,0,0],  
        [0,0,7,0,5,0,0,0,6],  
        [0,0,0,3,0,7,0,0,0],  
        [5,0,0,0,1,0,7,0,0],  
        [0,0,0,0,0,0,1,0,9],  
        [0,2,0,6,0,0,0,5,0],  
        [0,5,4,0,0,8,0,7,0]]
```